



Technische  
Universität  
Braunschweig

# Carolo-Cup



## Carolo-Master-Cup@Home Regulations 2022

December 21, 2021

Email: [carolocup@ifr.ing.tu-bs.de](mailto:carolocup@ifr.ing.tu-bs.de)  
Website: [www.carolo-cup.de](http://www.carolo-cup.de)



# Contents

<b>1</b>	<b>Overview</b>	<b>4</b>
1.1	Objectives . . . . .	4
1.2	Tasks . . . . .	4
1.3	Scoring . . . . .	4
1.4	Competition . . . . .	5
1.5	Regulations . . . . .	5
<b>2</b>	<b>Prerequisites for Attending</b>	<b>7</b>
2.1	Status of Enrollment . . . . .	7
2.2	Minimum Age . . . . .	7
2.3	Number of Teams per Institution . . . . .	7
2.4	Registration . . . . .	7
2.5	Publication Rights . . . . .	8
<b>3</b>	<b>Vehicle Requirements and Limitations</b>	<b>9</b>
3.1	Drivetrain . . . . .	9
3.2	Energy Supply . . . . .	9
3.3	Physical Dimensions . . . . .	9
3.4	Steering / Tires . . . . .	9
3.5	Sensor Setup . . . . .	10
3.6	Data Transmission . . . . .	10
3.7	Bodywork . . . . .	10
3.8	RC-Mode . . . . .	10
3.9	Handling of the Vehicle . . . . .	11
3.10	Lights . . . . .	11
3.11	Development Know-How . . . . .	11
3.12	Safety Regulations . . . . .	12
3.13	Modification of the Vehicle . . . . .	12
<b>4</b>	<b>Static Events</b>	<b>13</b>
4.1	Overall Concept Presentation . . . . .	13
4.2	Presentation of Technical Approaches . . . . .	13
4.3	Presentation of Project Management Processes . . . . .	13
4.4	Deliverables: Presentations . . . . .	13
4.5	Agenda . . . . .	14
<b>5</b>	<b>Dynamic Events</b>	<b>15</b>
5.1	Referees . . . . .	15
5.2	Free Drive (w/o Obstacles) and Parking . . . . .	15
5.3	Obstacle Evasion Course . . . . .	18



<b>A</b>	<b>Appendix</b>	<b>23</b>
A.1	Road Description . . . . .	25
A.2	Traffic Signs . . . . .	35
A.3	Dimensions of Obstacles . . . . .	37
A.4	Example Circuit . . . . .	38
A.5	Markings of the Start Box Gate . . . . .	39



Legend:

- Due to the repeated organization of the Carolo-Cup in “@Home” format, this document does not contain any significant changes. Therefore, the highlighting of the differences to **last year’s** version in **red** is omitted. New or deleted paragraphs might not be marked.



# 1 Overview

## 1.1 Objectives

The student competition “Carolo-Cup” provides a platform for student teams to get involved with the conceptualization and implementation of automated model vehicles. The challenge is to realize the best performing vehicle guidance system for different scenarios, which have been derived from requirements arising from a realistic environment.

In the annual competition, participating students have the opportunity to present their know-how in front of judges from industry and academia while competing with teams from other universities.

## 1.2 Tasks

The student team is put in charge of developing, producing, and demonstrating a cost- and energy-efficient 1:10 concept for an automated vehicle by a fictional OEM. In the “@Home” format, teams will prepare a video of their vehicle mastering a predetermined set of scenarios. In addition, the developed concept must be presented and explained.

## 1.3 Scoring

Each concept and its realization will be assessed in comparison to the results of the other participating teams. For this, the teams compete in different static and dynamic events, while being awarded at most 400 points. Points will only be awarded after successful registration and participation in both, the static events and the video competition.

The maximum amount of points is distributed to the different events as follows:

<b>Static Events:</b>	
S1: Presentation and Overall Concept	150 Points
S2: Technical Approaches	150 Points
<b>Dynamic Events:</b>	
Video competition first place	100 Points
Video competition second place	50 Points
Video competition third place	25 Points
<b>Maximum Score:</b>	<b>400 Points</b>



## 1.4 Competition

### 1.4.1 Organization

The student competition “Carolo-Cup” is organized and presented by the Technische Universität Carolo-Wilhelmina in Braunschweig.

### 1.4.2 Awards and Prizes

It is intended to recognize teams that participate in the static events and submit a video according to the competition assignment of the “Carolo-Master-Cup” with a cash award.

### 1.4.3 Dates

The “Carolo-Cup” annually takes place in the first quarter of a year. In 2022, the virtual presentations will be performed in March. The videos will be submitted and evaluated in February. (Due) dates will be published on the website.

### 1.4.4 Venue

The Carolo-Cup@Home is a virtual event.

### 1.4.5 Language

The official “Carolo-Cup” language is English. Communication with the teams (emails, phone calls, etc.) are also possible to be conducted in German.

## 1.5 Regulations

### 1.5.1 Commission

Rules and obligations of the “Carolo-Cup” can only be modified by the “Carolo-Cup Regulations Commission”. In cases of uncertainty or discrepancy the commission is responsible for official statements.



### **1.5.2 Validity of Regulations**

Only the regulations which have been published on the official website are valid for the competition. Old Regulations are invalidated, as soon as a new version of the regulations is published. Updates of the regulations will additionally be announced to registered teams.

### **1.5.3 Questions**

Every participant is obliged to thoroughly read, understand, and accept the regulations. In case of questions, the commission is to be consulted. Questions can directly be posed to the commission, contact information is published on the official “Carolo-Cup” website.

### **1.5.4 Authority**

The commission can change the schedule or the regulations of the event at any time. All participants are obliged to cooperate with the commission and follow their instructions.

### **1.5.5 Limit of participating teams**

The commission reserves the right to limit the number of participating teams if this becomes necessary due to organizational reasons. In case of such a limit additional qualifying tasks may be requested from the teams.



## 2 Prerequisites for Attending

Only students fulfilling the following conditions are allowed to participate in the “Carolo-Cup” competition.

### 2.1 Status of Enrollment

Every participant must either be currently enrolled in a Bachelor’s, Master’s or a comparable degree program or the respective degree must not have been obtained more than six months before the competition. A corresponding registration number / certificate of enrollment has to be presented with the registration for the competition. There is no restriction concerning the subject of study. Research staff and PhD students may not participate actively in conceptualization or development of the vehicle. They may not participate actively in the competition (cf. Section 3.11).

### 2.2 Minimum Age

Participants must be over 18 years of age at the start of the competition.

### 2.3 Number of Teams per Institution

The number of teams per Institution is not limited. However, the development of the vehicles must be strictly separated. Software and hardware architectures of the respective teams must differ significantly.

### 2.4 Registration

Details concerning the registration will be published on the website.

#### 2.4.1 Date of Registration

Due dates for registration can be found on the website.





### 2.4.2 Admission Fee

An admission fee of 100 € per team is issued for the “Carolo-Cup@Home”. The admission fee covers organizational expenses and is not refundable.

### 2.4.3 Registration Form

Details on the registration process will be published on the website. The registration is only complete if the student enrollment status is confirmed for all team members. A respective document provided by the commission must be filled and sent until the end of the registration period (unless a different deadline is communicated). The registration will be revoked in case of falsely filled information.

### 2.4.4 Competition Assignment

Teams are free to choose whether to participate in the “Carolo-Basic-Cup” or in the “Carolo-Master-Cup” during registration. Apart from this, the following exception applies:

- Teams that participated in the previous “Carolo-Master-Cup@Home” have to participate in the “Carolo-Master-Cup@Home”.

Exceptions from these regulations need to be discussed with the commission.

## 2.5 Publication Rights

By registering, every team and every participant declare their agreement with the publication of image, video and audio recordings. This also includes videos submitted for the video competition and recordings of team presentations. Every team and every participant have the right at any time to revoke their consent, in whole or in part, in writing with reference to the corresponding publication with effect for the future by sending their request to [carolocup@ifr.ing.tu-bs.de](mailto:carolocup@ifr.ing.tu-bs.de). A revocation does not include publications that have already been made.



## 3 Vehicle Requirements and Limitations

The observance of the following regulations will be monitored during the competition. Violating these regulations will lead to a deduction of points or exclusion from the competition. The same vehicle must be used for all events.

### 3.1 Drivetrain

The vehicle must be equipped with (an) electric motor(s). The number of driven wheels is not limited (torque vectoring is allowed). Other motors (e.g. combustion engines) are not permitted.

### 3.2 Energy Supply

Energy must be supplied in the form of batteries. Changing the batteries between single events is allowed.

### 3.3 Physical Dimensions

The vehicles must be based on four-wheeled 1:10 scale chassis. Only two axles are permitted. The wheel base must measure at least 200 mm. The track width (measured from the center of the wheels) must measure at least 160 mm. The vehicle, including possible extensions and bodywork, must not be wider than 300 mm. The height of fixed installations must not exceed a height of 300 mm above the track surface. Flexible antennae are allowed. Apart from this, the design of the chassis is subject to the team's creativity, as long as it adheres the maximum physical dimensions.

### 3.4 Steering / Tires

At least one axle must be steerable. Teams are expected to use cushion or foam rubber tires. The use of traction additives or studded tires is not allowed.



## 3.5 Sensor Setup

The sensor setup can be arbitrarily chosen by the teams. Laser sensors are allowed only up to class 2 devices.

## 3.6 Data Transmission

No data or signals must be transferred from the vehicle to the outside world during the dynamic events, except for those signals necessary for the remote control (cf. Section 3.8).

## 3.7 Bodywork

The teams must be able to quickly disassemble the vehicles' bodywork, so that the inner parts of the vehicle can be inspected at any times. The bodywork must conform to IP 10 (EN 60529).

## 3.8 RC-Mode

In emergency situations, the vehicle must be stoppable and maneuverable using a remote control. This can become necessary due to faults or errors in the data processing or due to other problems so that the vehicle cannot continue to execute its automated driving task.

### 3.8.1 Activating RC-Mode

RC-mode is activated by the remote control. An active RC-mode must be signaled by utilizing a sufficiently bright, flashing, blue light, which is visible from any position on the track. The light must be fixed at the highest point of the vehicle. The light must flash with a frequency of 1 Hz, showing a duty cycle of 50 %, beginning with the status "on" when activating RC-mode. RC-mode must only be activated after a clear misbehavior of the vehicle. This means e.g. completely leaving the designated course of the track.

### 3.8.2 Driving in RC-Mode

Activation of RC-mode must instantly bring the vehicle to a complete halt, without further steering maneuvers. The vehicle must be in standstill for at least 1 s before it may be controlled with the remote control. During the events, the vehicle must not drive faster than 0.3 m/s forward and backward when RC-mode is engaged. Additional functionality is not allowed in RC-mode.



## 3.9 Handling of the Vehicle

The vehicle must provide two distinctive buttons (e.g. push-buttons, touchscreen buttons, etc.), which start the different modes for the dynamic events. The buttons must be uniquely identifiable and easily reachable in order to allow non-team members (e.g. Judges, Referees) to start the vehicle.

## 3.10 Lights

As in real traffic, lights shall signal different driving maneuvers.

### 3.10.1 Braking Lights

Three clearly visible and differentiable braking lights must be installed at the rear of the vehicle. Active braking must be signaled.

### 3.10.2 Direction Indicators

Each corner of the vehicle must be equipped with a yellow / orange light. The respective lights at the correct side must be flashed at a frequency of maximal 2 Hz (50 % duty-cycle, initial state “on”) when overtaking, turning, or parking.

### 3.10.3 RC-Mode-Indicator

A clearly visible blue light is to be installed at the highest point of the vehicle, which flashes to signal the activation of RC-mode (cf. Section 3.8).

## 3.11 Development Know-How

The basic concepts of the vehicle must be conceptualized and implemented by the students themselves. They must not accept the direct help of professional engineers or suppliers. The students are encouraged to do research and/or discuss their problems with professional engineers or suppliers. Ready-made solutions may never be included in the vehicle. This particularly concerns the use of predesigned algorithms which may be part of a hardware platform and serve the purpose of providing a fully functional system for perception, behavior generation, or control for automated vehicles or robots. The final decision on acceptable components is taken by the commission. The teams are encouraged to contact the commission early in case of doubts or questions about a particular component. In case of violating these guidelines or intentional fraud, the commission has the right to exclude the respective team from the competition.



## 3.12 Safety Regulations

Each individual is required at all times to take care that no other participants are injured or other vehicles are damaged due to careless behavior.

As far as the sensor setup is concerned, special requirements and restrictions arise. All components within the vehicles must adhere to established guidelines for safe public usage. Particularly the usage of active sensors can be limited by this rule. The teams must make sure that no third parties are subject to possible injury due to installation or handling of the sensors.

## 3.13 Modification of the Vehicle

Teams are encouraged to refrain from making significant changes to the hardware or software of the vehicles within the video competition.



## 4 Static Events

During the static events, the teams must present and defend their concepts in front of a jury. Each key aspect of the presentation is rated with an individual score between 10 (maximum score) and 0 (no points). The judges are experts from industry and academia.

The maximum attainable score is described in Section 1.3.

### 4.1 Overall Concept Presentation

Each team has the possibility to explain the overall concept behind their vehicle, independent from the required functionality for the dynamic events. The overall concept specifically covers the software and hardware architecture of the vehicle. Additionally, each team shall present how energy and cost efficiency have been considered during the design phase. Sponsored hardware has to be included in the cost estimation at retail price. Purchase prices must be assessed for self-made items. Wrong assumptions will be reflected in the overall score.

### 4.2 Presentation of Technical Approaches

Each team must present their strategy for mastering the challenges of the dynamic events. The main challenges are: Lane detection and lateral control, parking, handling of obstacles, intersections, road markings, and traffic signs. The aspects of perception and control must be described for each major function.

### 4.3 Presentation of Project Management Processes

The teams shall explain how obtained knowledge and know-how is preserved for future team generations (knowledge management). In addition to the regular project management, the challenges of the pandemic situation and the solutions found shall again be explained as part of the presentation. The teams should address what protective measures have been taken in their facility and under which hygiene concept they operate.

### 4.4 Deliverables: Presentations

All presentations must be digitally available (ppt, pptx or pdf) and sent to [carolocup-konzepte@ifr.ing.tu-bs.de](mailto:carolocup-konzepte@ifr.ing.tu-bs.de) by **March 3, 2022 at 8:00 CET**. The files must not exceed a file size of 10 MB. The due date for presentation files will be announced on the



website. Late submission of presentations will be penalized with a loss of 100 points in the static events result. The teams will be asked to prepare slides to introduce their team during the dynamic events. Details will be announced prior to the competition.

## 4.5 Agenda

Presentations will be performed in a virtual environment in front of the jury, interested representatives of other teams, and guests of the event. There is a time budget of 20 min for the actual presentation. After this budget, the presentation will be interrupted by the jury, followed by a panel discussion of about 10 min. The evaluation sheet for the static events will be made known to the teams prior to the competition. The length of the presentation is subject to change in case of a large number of participating teams. In this case the teams will be informed sufficiently early.



## 5 Dynamic Events

During the dynamic events, the actual performance of the automated model vehicles will be challenged in a video competition inspired by two different disciplines (Free Drive and Parking, Obstacle Evasion Course).

“Carolo-Master-Cup” videos will be evaluated separate from the “Carolo-Basic-Cup” videos, due to the additional elements of the “Carolo-Master-Cup”.

The circuit contains a variety of elements and challenges. Parking maneuvers are performed in a distinctive parking zone following the starting line during the “Free Drive” discipline. The additional elements of the “Obstacle Evasion Course” combine the rural road scenario with challenges of suburban scenarios.

### 5.1 Referees

A jury consisting of experts from industry and academia will evaluate the submitted videos. The three highest ranked videos will be awarded with points as described in Section 1.3.

### 5.2 Free Drive (w/o Obstacles) and Parking

Some of the challenges encountered for the video competition originate from a round course without obstacles that includes a parking lot. The vehicle drives in the right lane.

#### 5.2.1 Scenario

The complexity of this scenario is limited. It consists of a road with two parallel lanes - one for each driving direction. This scenario shall imitate a rural road environment, consisting of long straight sections, tight turns, intersections, side road junctions and also containing a parking lot. The lanes are limited by different types of lane markings. All markings are white and approx. 18 mm to 20 mm wide, if not specified differently. The starting line (a checkered line of approx. 50 mm) marks the beginning of the track, which is the parking zone (cf. Section A.1.1).

##### 5.2.1.1 Parking Lot

Following the starting line and indicated by a traffic sign, there are parking areas containing spots for parking in parallel and perpendicular orientation to the track within the next 20 m. The parking zone is a planar and straight part of the track with a dashed center line without missing lane markings. Additional elements (intersections, missing lane markings, traffic signs, etc.) are not present. All areas for parking are located in this zone.





**Parallel Parking** Within the parking zone there is at least one parallel parking area next to the right lane. White cardboard boxes represent other vehicles. The boxes can be fixed to the ground. There is a space of 20 mm to 200 mm between the right lane marking and the side of the obstacle which faces the track. The obstacles measure at least 100 mm in height and length. The parking area and the track are located in the same ground plane. Individual parking spots of the parking area can be marked as no parking zones. These areas may not be used for parking, but may be used for maneuvering.

There will be multiple parking spots of different size in the parallel parking area(s) next to the track. The left and right hand limits of the parking spots are defined by the right lane marking and an additional solid white line (also 18 mm to 20 mm wide). Front and rear limits are defined either by white cardboard boxes or by a no parking zone (cf. Section A.1.1.1). Approaching from the starting line, the parking spots will be growing in length. The final and largest spot will be at least 700 mm in length. Nevertheless, small distances of under 400 mm might be present between obstacles anywhere inside the parallel parking area(s).

**Perpendicular Parking** An additional type of parking area within the parking zone consists of several parking spots with a perpendicular orientation to the track. Such area is located at least once on the left hand side of the track and may also be used for parking. All spots have the same size, as shown in Section A.1.1.2. The parking spots are separated and limited to the front as well as to the rear by 18 mm to 20 mm wide white markings. Parking spots can be blocked by obstacles or no parking zones. A parking spot is considered to be blocked, if the vehicle cannot be placed completely inside the spot. Obstacles possess the same dimensions as in the parallel parking area and can be placed at a distance of 20 mm to 100 mm from the solid left lane marking. For parking, the vehicle must be positioned inside one marked spot that is not blocked. Vehicles may move forward or backward into the parking space. The left lane of the track may only be crossed during the actual parking maneuver. When searching for a parking spot, the vehicle must continue to use the right lane.

### 5.2.1.2 Lanewidth

Each lane has a width of 350 mm to 450 mm, measured from the inside of the respective markings. The left and right markings do not show lateral misalignments. However, the center line may under circumstances (e.g. because of change of marking type, cf. next Section) display lateral misalignments.

### 5.2.1.3 Lane markings

Both lanes are separated by a dashed center line. The center line is interrupted every 200 mm for another 200 mm. This shape continues until reaching an intersection or the starting line, so that the center line might stop with a gap at these points.

Alternatively to the dashed center line, a double solid line can be present. In this case the solid lines are spaced approx. 20 mm apart, yielding a total marking width of approx. 56 mm to 60 mm. A combination of a solid and a dashed line is also possible. In both cases, the inner



edges of the markings define the width of the lane. Marking types can occur in arbitrary order. Marking types will persist for a distance of at least 1000 mm. There will be immediate changes between marking types (cf. Section A.1.2). For the Free Drive event, these marking types are to be treated as regular dashed markings.

The left and right track boundaries are given by solid white lines. On straight sections of the track, the outer track boundaries can also mark side road junctions. In this case, the outer track boundaries are marked with 100 mm long dashes, interrupted by 50 mm long gaps. These markings are to be treated as solid lines and must not be crossed, as the vehicle is assumed to have the right of way. Side road junctions may be at most 960 mm long. The junction is only marked by the change in marking types, there are no further markings for the side lane.

Neighboring sections of the track are space at least 50 mm apart, measured from the outer edges of the markings. The minimal distance of the track to the end of the course area is 300 mm. The sharpest turn has an inner radius of 1000 mm.

The circuit is mostly planar. Parts of the track can show slopes of up to 10 % (0.1 m difference in height on a length of 1 m). Uphill and downhill grades will be announced by traffic signs (cf. Section A.2). The Signs will be placed at least 1000 mm prior to any change of slope.

All of the lane markings can be missing at arbitrary locations for a maximum of 2000 mm. Except for intersections, no more than two markings are missing at the same time. An example scenario is depicted in Section A.4 in the appendix.

In this event, no obstacles are located on the track. Possible stop lines and regulations concerning the right of way are to be ignored.

#### 5.2.1.4 Traffic Signs

In addition to the parking sign at the starting line and the steep hill signs described above, other supporting traffic signs can be present on the roadside. Guide signs will be used to indicate sharp turns. They mark a curved section of the track with radii below 1200 mm, if it is located after a straight section of at least 3 m length. A first guide sign will be placed approx. 1.5 m before the transition to the turn. The second sign marks the beginning of the turn. Smaller signs will be repeated approximately every 400 mm until reaching the apex of the turn.

Additional traffic signs can be present at the roadside. They are located on the right hand side of the lane. For an exact specification see Section A.2. In this event, regulations announced by traffic signs can be ignored.

#### 5.2.1.5 Artifacts

The design of the area outside of the road is not defined. Artifacts in the form of objects or remainders of lane markings might be located outside of the road area. The minimal distance between artifacts and valid lane markings is 100 mm.



## 5.3 Obstacle Evasion Course

Additional challenges encountered for the video competition originate from the “Obstacle Evasion Course” with additional elements which need to be considered during the driving task. Static and dynamic obstacles are added to the rural road scenario. The track does additionally contain at least one suburban section at this point. All definitions concerning the course of the road maintain validity. There will be at least 1000 mm track length between obstacles. The additional elements are spaced at least 1000 mm apart as well and do not overlap. Oncoming traffic is not to be expected, except when passing barred areas inside the suburban scenario.

### 5.3.1 Static Obstacles

During this event, a number of static obstacles will be placed in the right lane, in the left lane and outside of the track. The body of each obstacle consists of white cardboard with dimensions as specified in the appendix (Section A.3.1). Obstacles can be fixed on the ground. The obstacles are not always placed exactly in a specific lane, however under no circumstance can both lanes be blocked. In this sense, static obstacles outside the track are no artifacts in the sense of Section 5.2.1.5. Thus, the described minimum distance to lane markings for artifacts does not apply.

Obstacles may force the vehicle to change lanes. Lane changes must be indicated using the turn indicators. Passing maneuvers must be executed without touching an obstacle. They must be completed after a maximum distance of 2 m after having passed the obstacle.

### 5.3.2 Dynamic Obstacles

Apart from static obstacles, at least one dynamic obstacle is present on the track. Its shape resembles the static obstacles (“driving white cardboard box”) and it can be encountered in both lanes and in combination with other track elements, as long as this is not explicitly excluded. It moves at a speed of 0.6 m/s. Dynamic obstacles do not execute lane changes and do not perform any passing maneuver.

Dynamic obstacles can stop temporarily and potentially block the right lane. It may be passed, but not in intersections. Passing maneuvers in intersections are penalized. A dynamic obstacle will not block both lanes in combination with a static obstacle, unless passing is prohibited in the area (cf. Section 5.3.4). Thus, allowed passing maneuvers can always be executed without encountering an obstacle on the left lane. The passing maneuver is subject to the same regulations as when passing a static obstacle.

### 5.3.3 Intersections of the Rural Road Scenario

Sections of the track can be part of intersections with other parts of the track. The respective lanes meet at angles between 70° and 90°. An intersection possesses three to four entries or exits respectively. Design and layout of the intersections of the rural road scenario are shown



in the appendix (Section A.1.3). Left and right lane boundaries of intersecting lanes can be connected through a rounded transition with a radius of about 100 mm. Intersections of the rural road scenario must be crossed driving straight.

Entries to intersections can display stop lines. These lines are 36 mm to 40 mm wide and cross one lane completely. Additionally, a stop line is complemented by a traffic sign (stop sign, cf. Section A.2). Entries without a stop line are not marked separately. The right of way is only announced by the respective traffic sign.

If a stop line is located in the own lane, the vehicle must stop for at least 3 s. The front of the vehicle must be located in front of the stop line, however the distance must not be greater than 150 mm. The right of way of a dynamic obstacle must be respected at an intersection, if the dynamic obstacle is located within the defined area (cf. Section A.1.3.1). If the vehicle does not possess the right of way, it must wait until the dynamic obstacle has completely crossed the intersection. Only one dynamic obstacle at a time can be present at an intersection.

### 5.3.4 No-Passing Zones

Sections of the track, not only in the suburban area, can be defined as no-passing zones. Corresponding traffic signs and lane markings will indicate such sections (cf. Section 5.2.1.3). In sections with a solid center line (a solid line within a double center line facing the ego lane) obstacles must not be passed.

However, if a passing maneuver has been started before a no-passing zone, the vehicle is allowed to return to the right lane in any case. In a no-passing zone, the dynamic obstacle must be followed at a distance of at least 300 mm until the end of the zone. Static obstacles will not block the right lane in no-passing zones. Since passing is prohibited, a combination of a dynamic obstacle in the right lane and a static object in the left lane can occur, temporarily blocking the whole track.

### 5.3.5 Two-lane Expressway

Sections of the rural scenario, can be defined as an expressway. The beginning and end of such sections will be indicated by traffic signs (cf. Section A.2). Expressways are a planar and mostly straight section of at least 10 m length, without any sharp turns. Any distinctive curve will be supported with traffic signs, as described in Section 5.2.1.4. Vehicles on the expressway have right of way, no stop lines will be encountered. No obstacles will be present in the right lane of this section. Since the track is assumed to be a two-lane expressway, the vehicles must stay in the right lane all the time.



### 5.3.6 Suburban Scenario

#### 5.3.6.1 Beginning and End of the Suburban Scenario

The suburban area is a special section of the track, containing additional elements compared to the track design of the rural road scenario. Beginning and end of suburban areas are defined by markings on the road surface (cf. Section A.1.9) and according traffic signs (cf. Section A.2). The speed limit within the suburban section, as indicated by the traffic signs has to be scaled by 1:10 (i.e. a speed limit of 30 km/h corresponds to 0.83 m/s). In addition to the speed limits depicted in the signs marking the suburban scenario, other numeric signs in steps of 10 km/h might appear (e.g. a speed limit of 20 km/h). Speed limit zones begin and end at the road markings, as depicted in Section A.1.4. The according traffic signs will be placed at those positions.

Elements of the suburban scenario will not be located on uphill and downhill grades.

#### 5.3.6.2 Traffic Signs

In addition to the traffic signs defined in Section 5.2.1.4 and 5.3.3, the suburban scenario contains several other traffic signs which must be respected. Each traffic sign defines the beginning of the connected elements as defined in the following sections. Traffic signs can only occur in combination with their connected element. The exact dimensions and positioning are defined in the appendix of this document (cf. Section A.2). Distances for longitudinal distances are measured on the right hand lane marking. Each Traffic Sign of the suburban scenario is complemented with specific markings on the road surface. Those markings must not have the same distance to the corresponding element as the traffic sign (cf. Section 5.3.6.7). See the following sections for the according specifications.

#### 5.3.6.3 Barred Area

In addition to obstacles, the suburban scenario can contain barred areas on straight sections of the track. These areas block one lane for a length of max. 2000 mm, measured along the outer lane marking. The areas must be passed just as a regular obstacle. Barred areas are marked with a 18 mm to 20 mm wide trapezoidal outline, filled with 36 mm to 40 mm wide white markings with black spacing. For shape and dimensions see Section A.1.5. The areas are at least 150 mm wide and are always connected with the left or right lane boundaries.

Oncoming traffic has the right of way at barred areas, indicated by a corresponding traffic sign (cf. Section A.2). If a dynamic obstacle is located within 1000 mm of the beginning of the barred area, the vehicle has to wait. Switching lanes is only allowed with an empty left lane, oncoming traffic must have completely passed. The desired passing maneuver has to be indicated while waiting by flashing the left turn indicators. Only one dynamic obstacle at a time can occur at a barred area. If the vehicle is able to pass a barred area without leaving the own lane or driving over the markings, the vehicle may continue along the barred area even in case of oncoming traffic.



#### 5.3.6.4 Crosswalks

In a suburban area, one or more crosswalks may be present. These are marked with several 36 mm to 40 mm wide and 400 mm long white markings parallel to the direction of travel which are spaced 40 mm apart (cf. Section A.1.6). A crosswalk is indicated by a corresponding traffic sign (cf. Section A.2). On the roadside at each crosswalk “pedestrians” may wait to cross the road. For this purpose two areas are defined which may contain relevant pedestrians. A “pedestrian” is depicted by a small white cardboard box in analogy to the static obstacles. In addition, each pedestrian is marked with a pictograph, in order to facilitate its detection (cf. Section A.3.2).

Multiple pedestrians can be located on the right as well as on the left hand side of the crosswalk. Pedestrians will always be clearly distinguishable from the view of the approaching vehicle. Only if at least one pedestrian is present in the defined zones, the vehicle must stop in front of the crosswalk. Stopping must be performed with the same regulations as at intersections. Pedestrians start crossing the street only after the vehicle has stopped. If all relevant pedestrians have crossed in front of the vehicle, the vehicle may continue. Driving on before all pedestrians started to cross and have cleared the right lane will be penalized as collisions with obstacles.

#### 5.3.6.5 Pedestrian Island

One or more pedestrian islands can be present in suburban areas. The two lanes are split by a barred area with a 18 mm to 20 mm wide outline, filled with 36 mm to 40 mm wide white markings with black spacing. The vehicle has to pass the island on the right side, as indicated by a corresponding traffic sign (cf. Section A.2) located inside the barred area. Dimensions of pedestrian islands are specified in the appendix (cf. Section A.1.7).

Pedestrians can be present on islands and on the opposite roadside. The vehicle does not have to wait for pedestrians to cross the road, unless the island is combined with a crosswalk (cf. Section A.1.7.1). In case of a combination with a crosswalk, the same regulations as described in Section 5.3.6.4 are applicable. If no crosswalk is present, pedestrians may not cross the street in front of a waiting vehicle, but stay at their spot.

Apart from crosswalks and pedestrian islands, pedestrians are not to be expected on the track.

#### 5.3.6.6 Extended Regulations at Intersections

In addition to the requirements arising from stop lines, there can be different regulations for the right of way at intersections in the suburban scenario. Three types of intersections have to be considered:

- Intersections with stop lines (cf. Section 5.3.3)
- Intersections with priority road and give-way lines
- Intersections without regulations by road markings or signs (priority to the right)



Dimensions and layout of the additional intersections are displayed in the appendix (cf. Section A.1.8.1 and A.1.8.2). Stop lines and give-way lines at priority roads are also announced by traffic signs (cf. Sections A.2). A give-way line is 36 mm to 40 mm wide and consists of 80 mm long dashes, interrupted by 60 mm long gaps. Stop and give-way lines occur in pairs at opposing intersection entries, unless the priority road displays a mandatory direction and requires turning (cf. next Section). At a give-way line, the vehicle must stop for at least 1 s. Dynamic obstacles must be considered in any type of intersection.

If an intersection does not contain any indication of priority by road markings or signs, priority to the right is to be applied. There will be no traffic signs to announce such intersections, while all four arms of the intersection will display a give-way line. The requirement to stop and potentially give the right of way to dynamic obstacles must still be respected. Scenarios which yield ambiguous regulations of the right of way will not be encountered.

#### 5.3.6.7 Turning

In addition to the intersections described above, intersections in the suburban scenario can have a mandatory direction to cross the intersection. Different scenarios are shown in Section A.1.8.3. This will be announced by a corresponding traffic sign and a marking on the road surface (cf. Sections A.2 and A.1.9). Vehicles will have to turn left or right according to these regulations. In the intersection, the mandatory direction will additionally be indicated by dashed turn lines that continue the center line and the right lane boundary. Turn lines cannot be missing.

#### 5.3.6.8 Speed Control

Within a suburban area, the vehicle has to adhere to the given speed limit. Devices for controlling the speed of the vehicle might be present.



## A Appendix

If not indicated differently, dimensions and angles specified in the figures have a tolerance of  $\pm 5\%$ . Unless otherwise noted, all dimensions are in millimeters (mm).

Dimensions and angles defined in the previous chapters may not be repeated in the figures.






Technische  
Universität  
Braunschweig




## A.1 Road Description

### A.1.1 Parking Lot

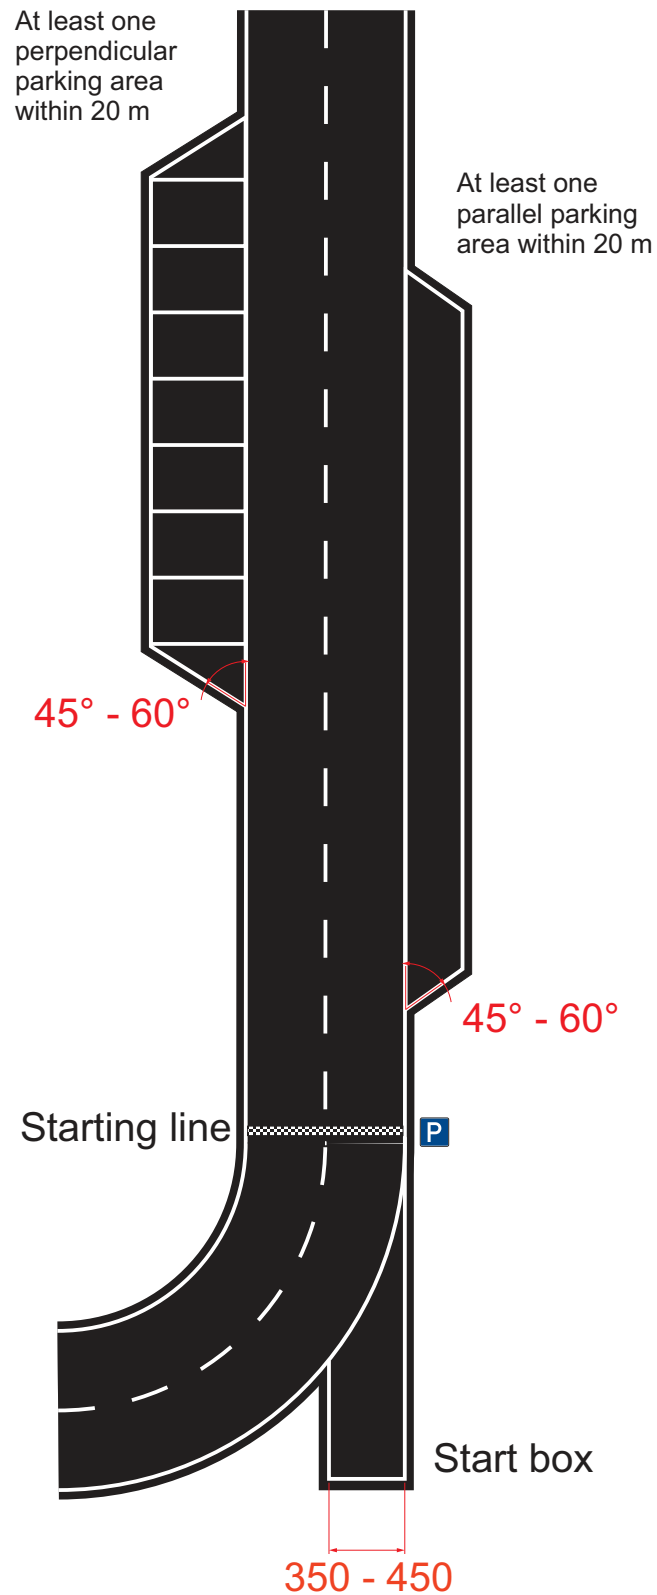





### A.1.1.1 Parallel Parking

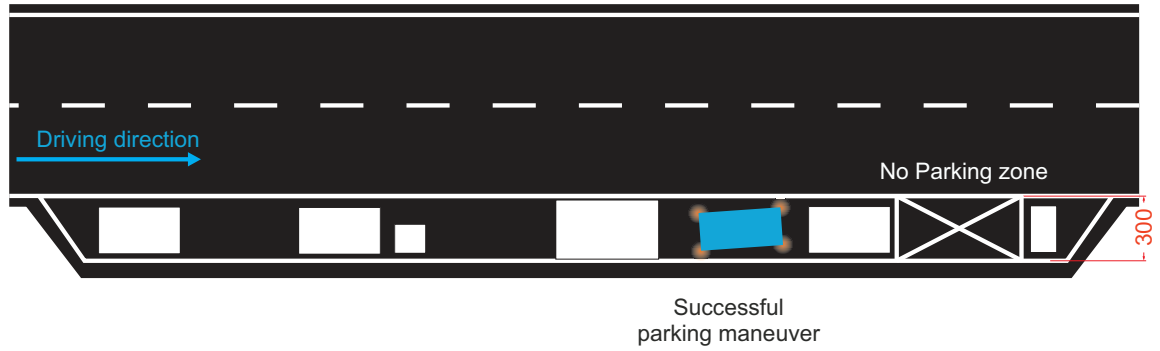

### A.1.1.2 Perpendicular Parking

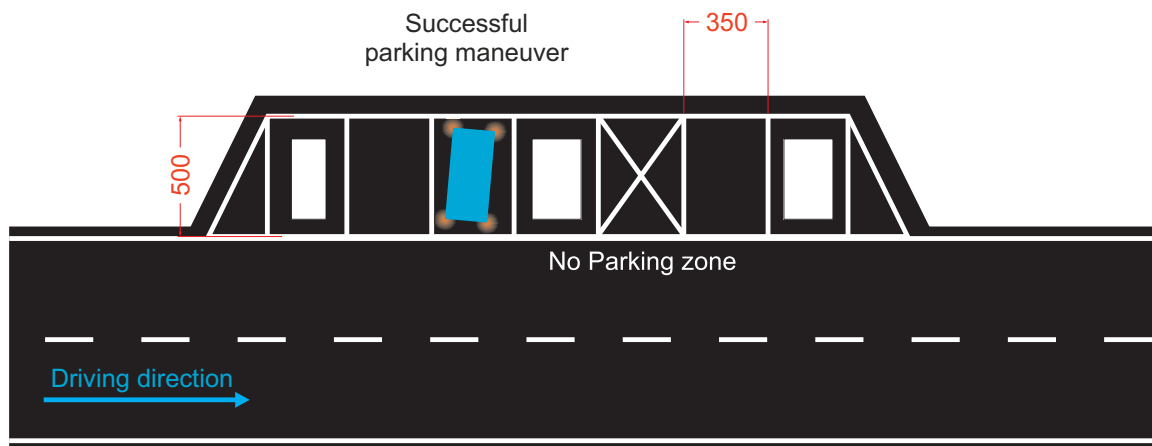


### A.1.2 Road Layout and Lane Markings

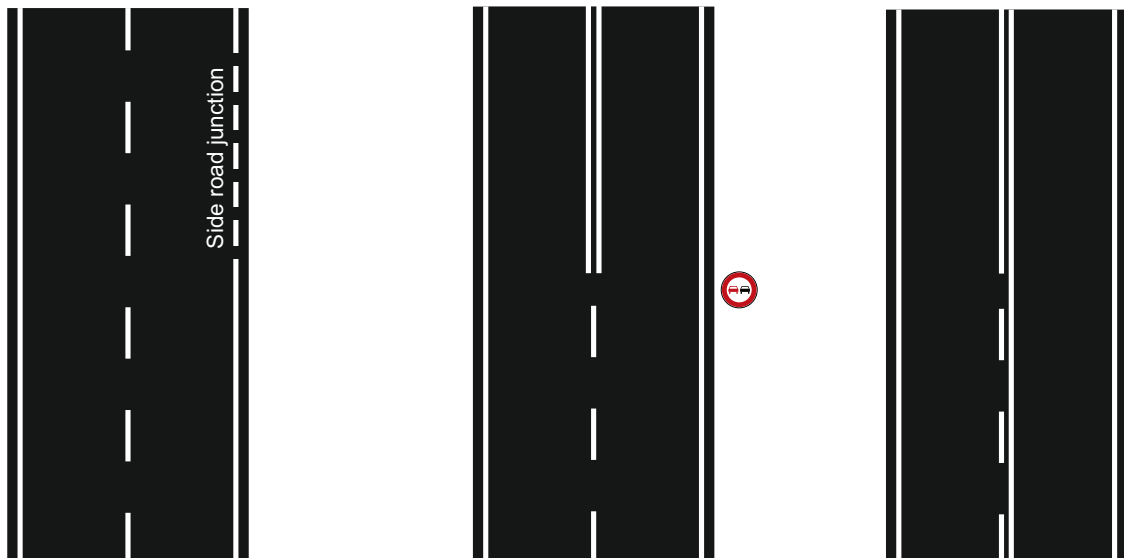




### A.1.3 Intersections of the Rural Road Scenario

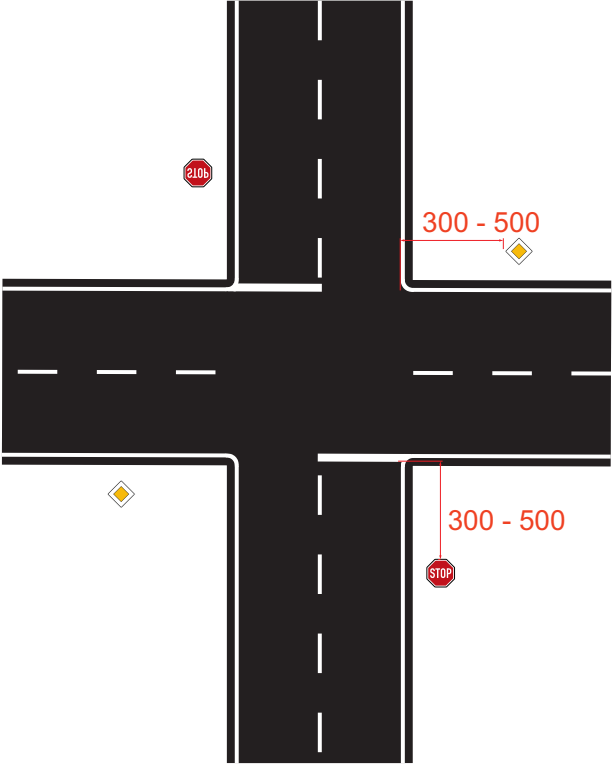


#### A.1.3.1 Dynamic Obstacles at Intersections - Give-Way Condition

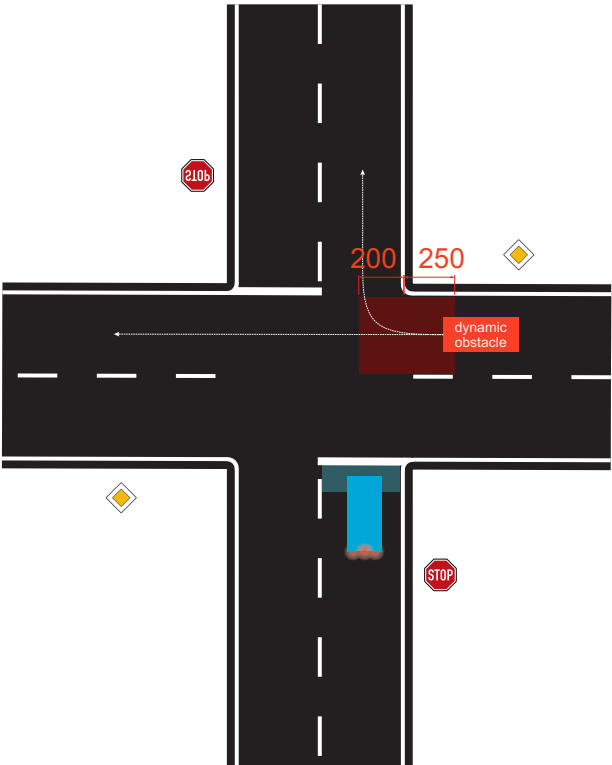




### A.1.4 Speed Limit Zone

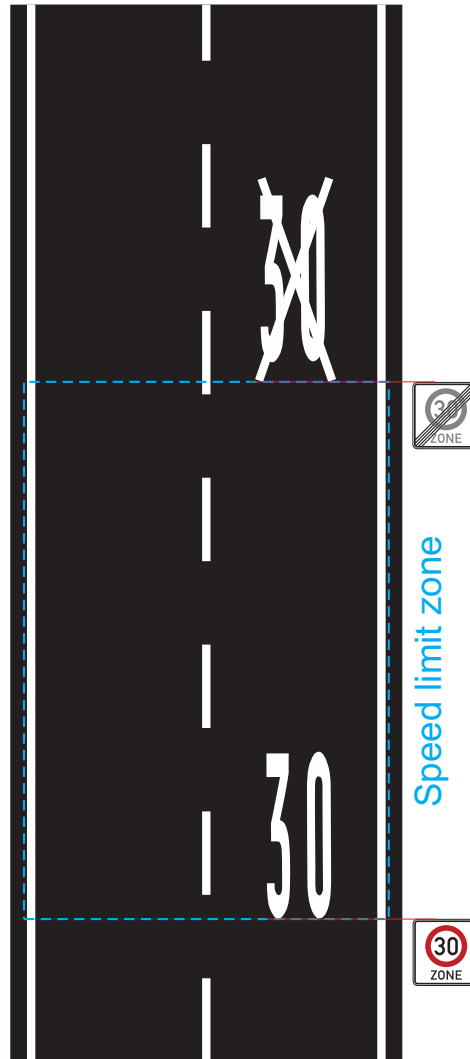


### A.1.5 Barred Areas

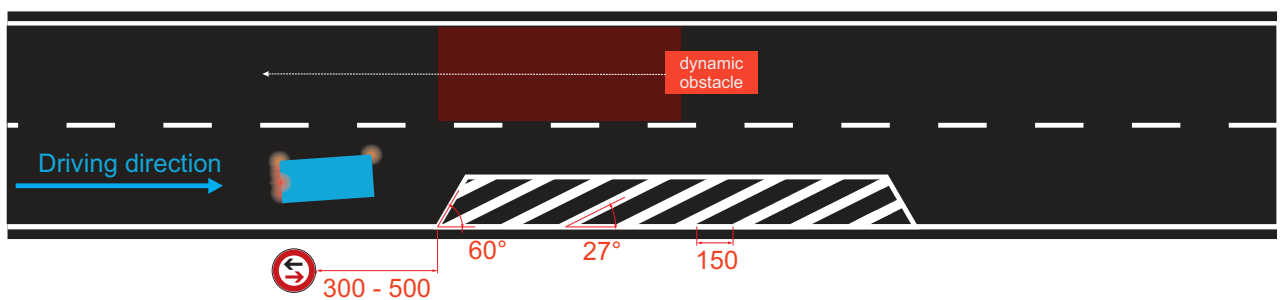




## A.1.6 Crosswalks

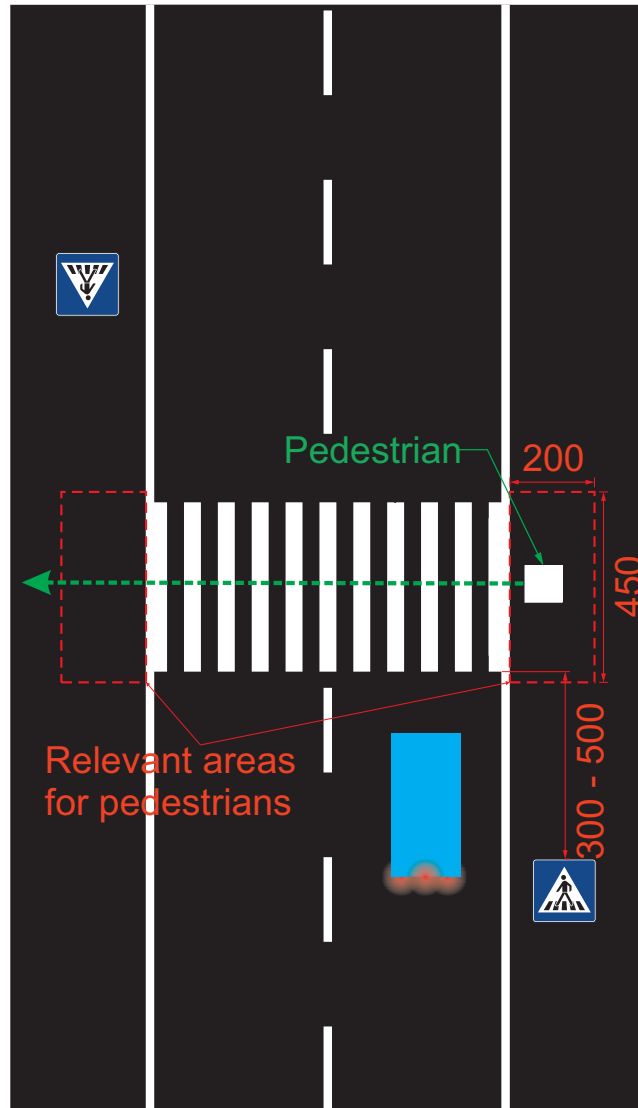




### A.1.7 Pedestrian Islands

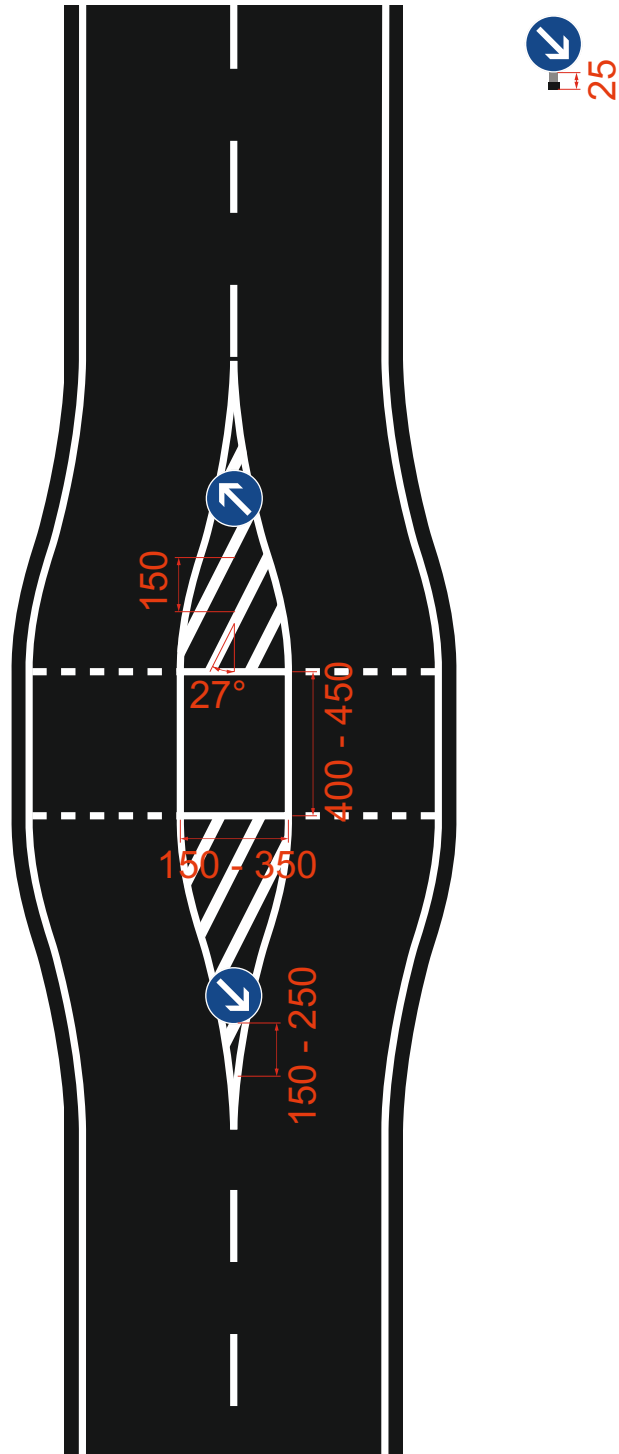



A.1.7.1 Pedestrian Islands with Crosswalk

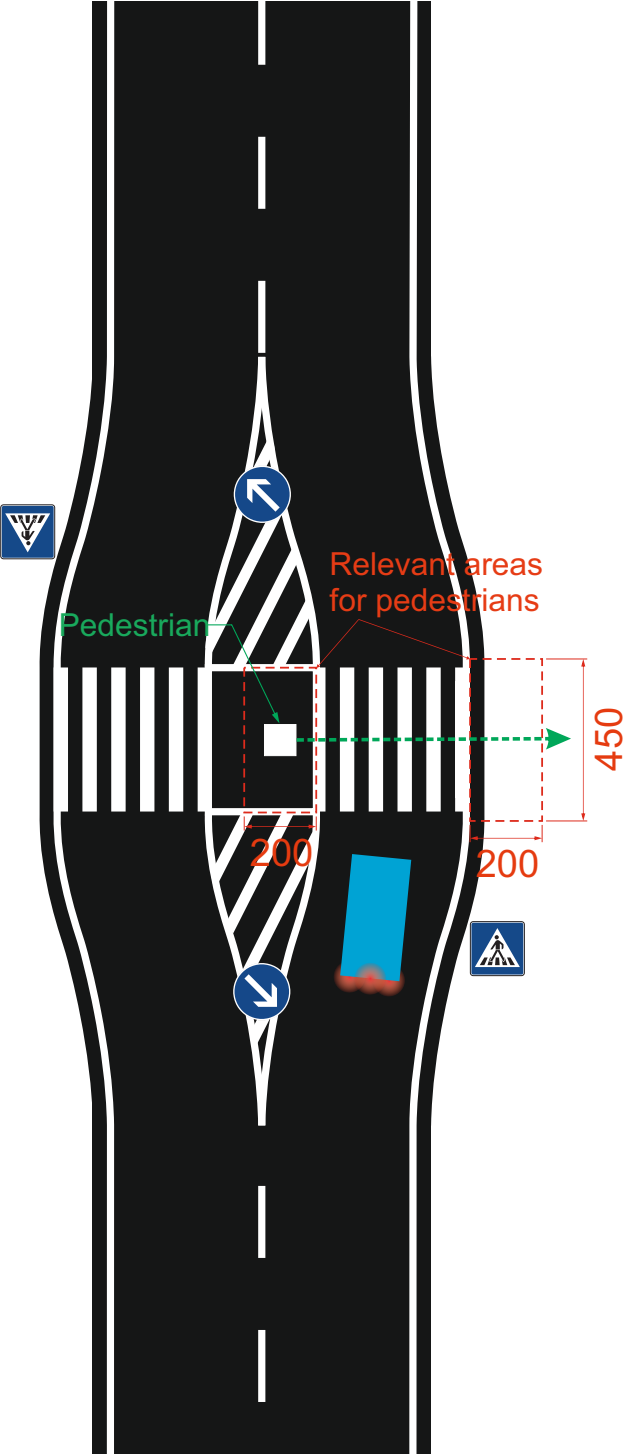






## A.1.8 Additional Intersections of the Suburban Scenario

### A.1.8.1 Intersections with Give-Way Lines

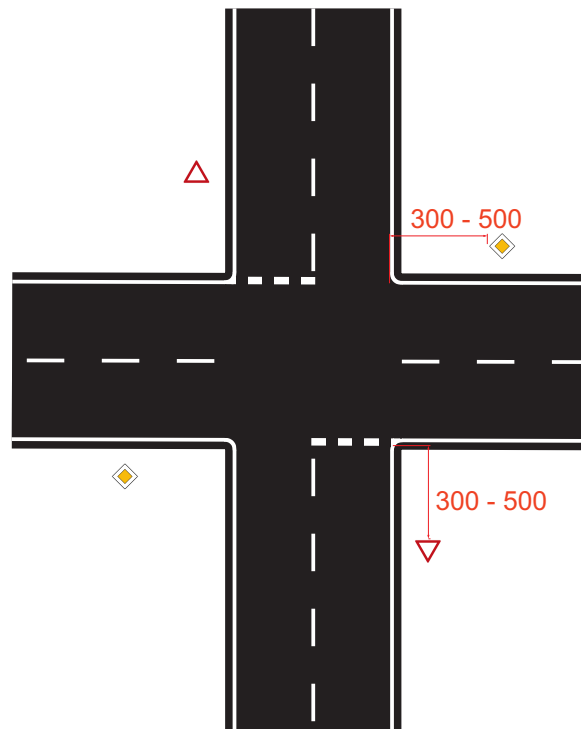


### A.1.8.2 Intersections with Priority to Right






### A.1.8.3 Intersection with Mandatory Turn

#### Mandatory Crossing Direction - Stop Condition

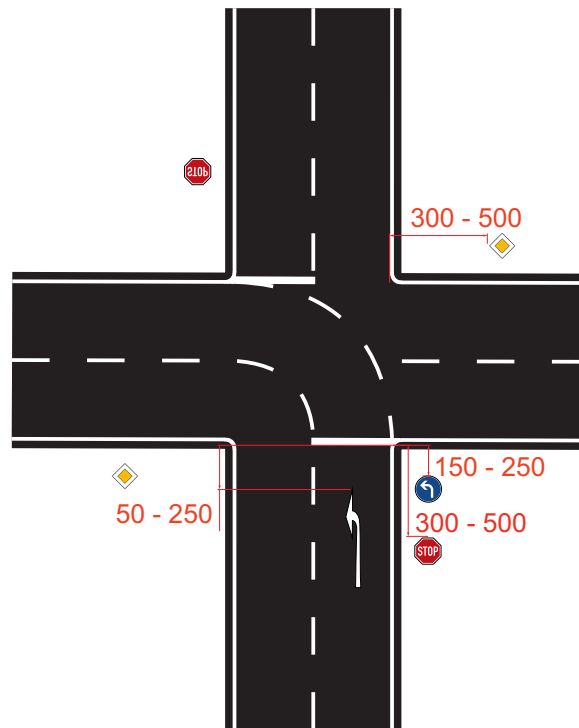


#### Mandatory Crossing Direction - Give-Way Condition

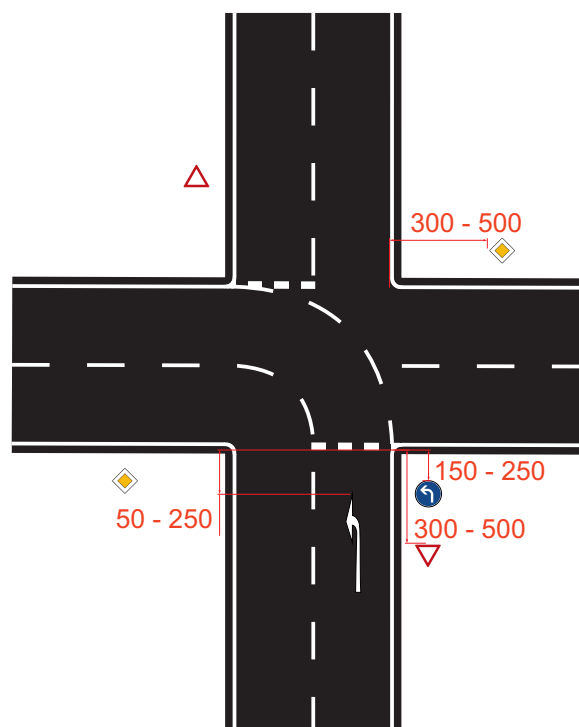





Mandatory Crossing Direction - Right of Way Condition

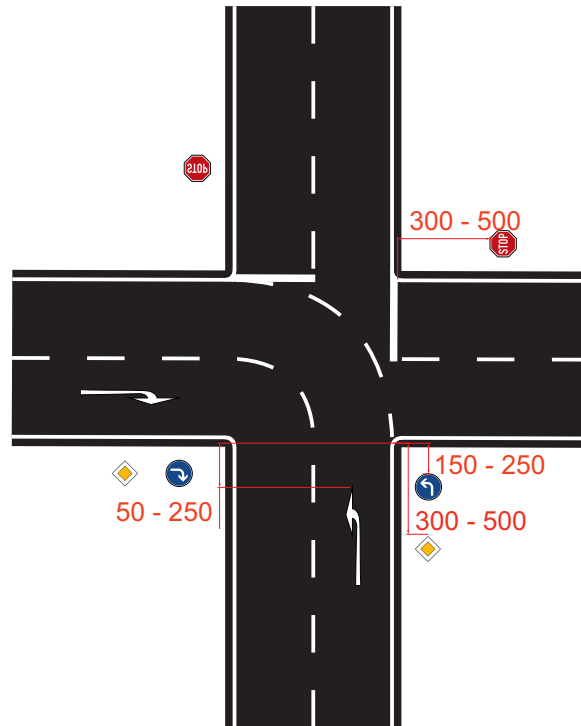


A.1.9 Road Markings

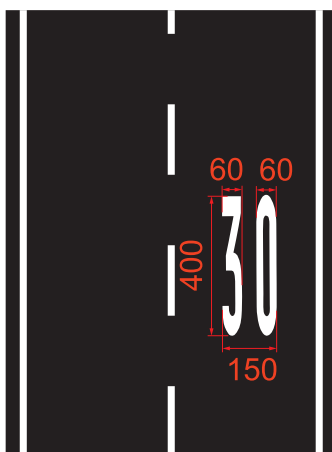

Speed limit zone

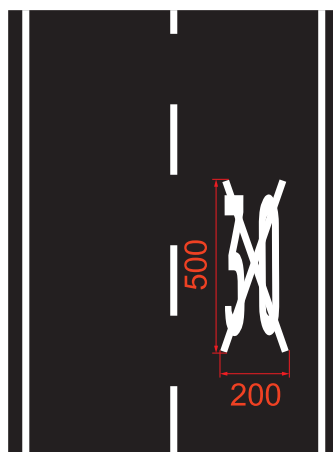

Speed limit zone end

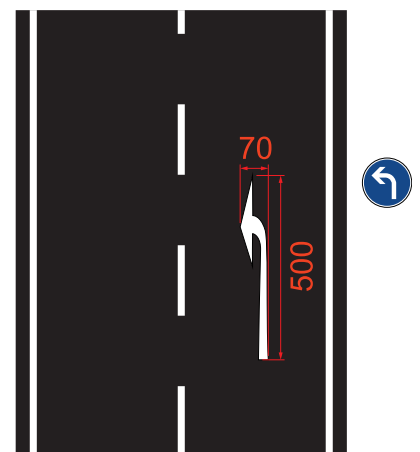

Turn left ahead




All digits possibly present



## A.2 Traffic Signs

### A.2.1 Definition of Traffic Signs

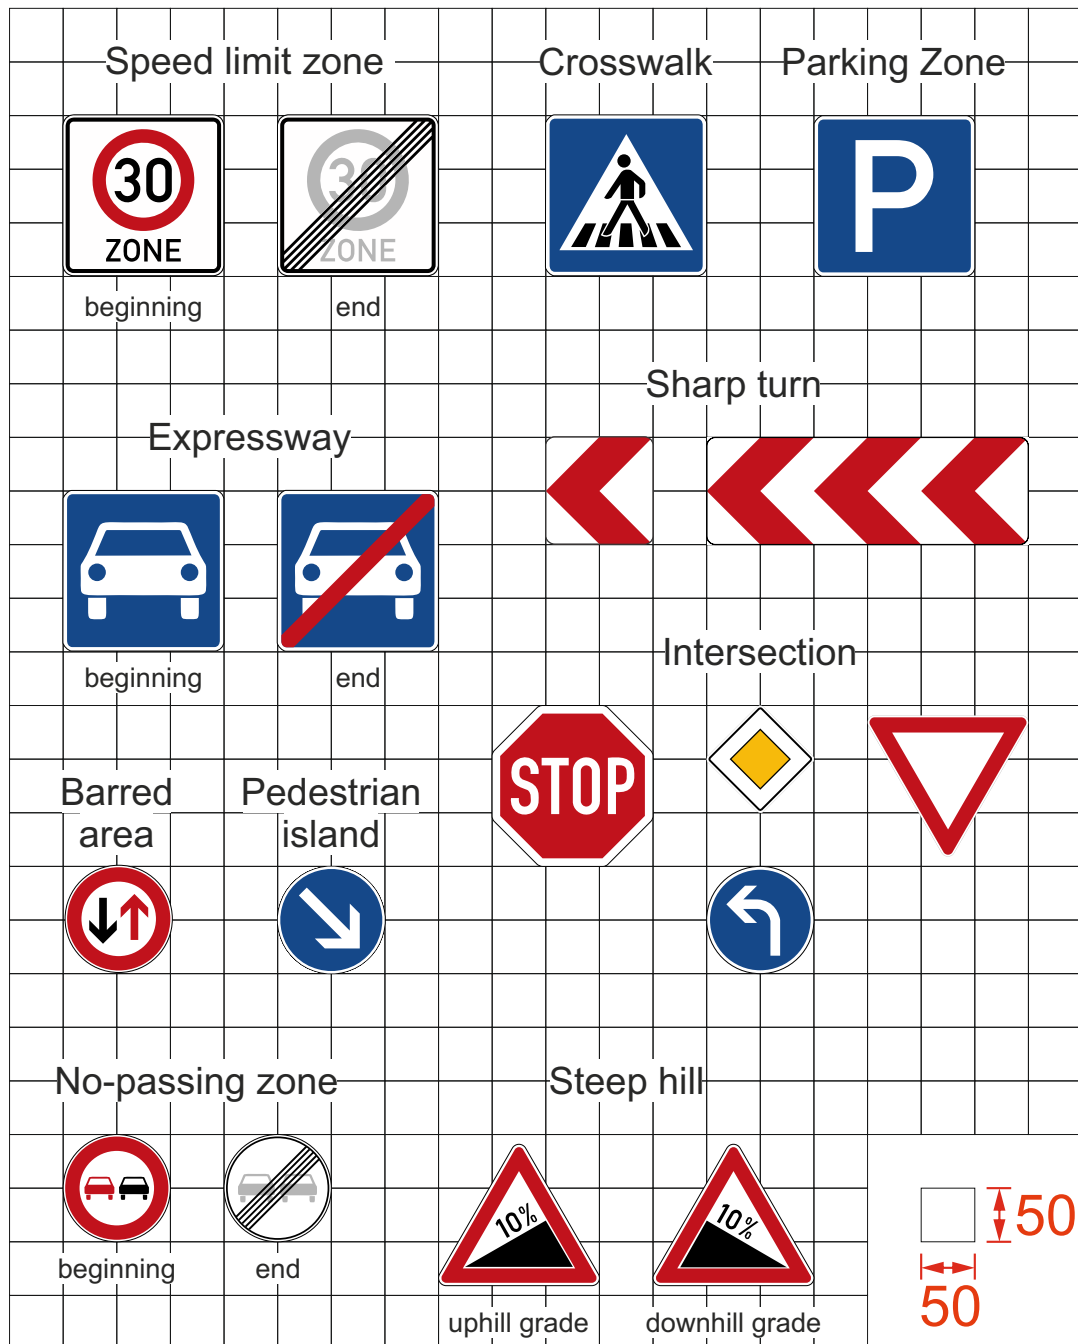

The traffic signs are defined according to StVO (Legal definition of traffic rules) and are applied as described there, except otherwise defined in this document. Additional information about the dimensions can be scaled based on this source.

Traffic signs might appear in their mirrored version as well, e.g. turning symbols can indicate right or left turns.




## A.2.2 Positioning of Traffic Signs (Example Sign)






## A.3 Dimensions of Obstacles

### A.3.1 Static and Dynamic Obstacles on the Track

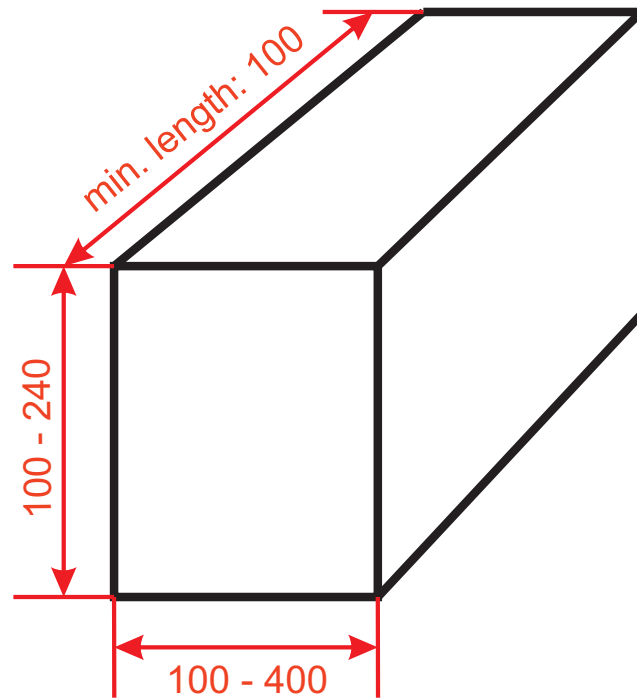


### A.3.2 Pedestrians

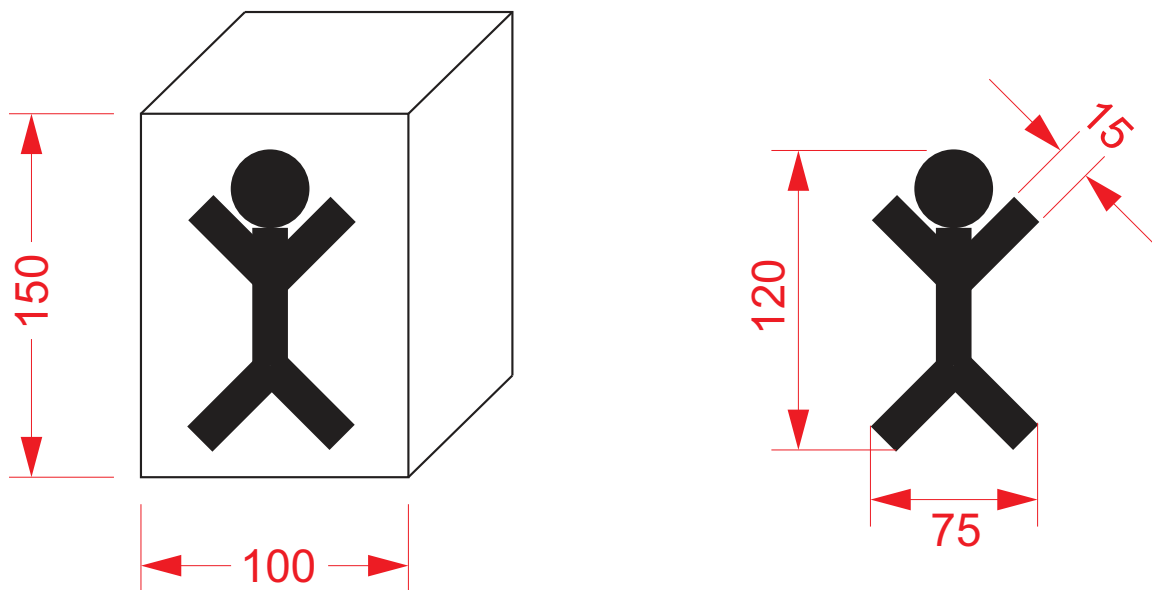



## A.4 Example Circuit

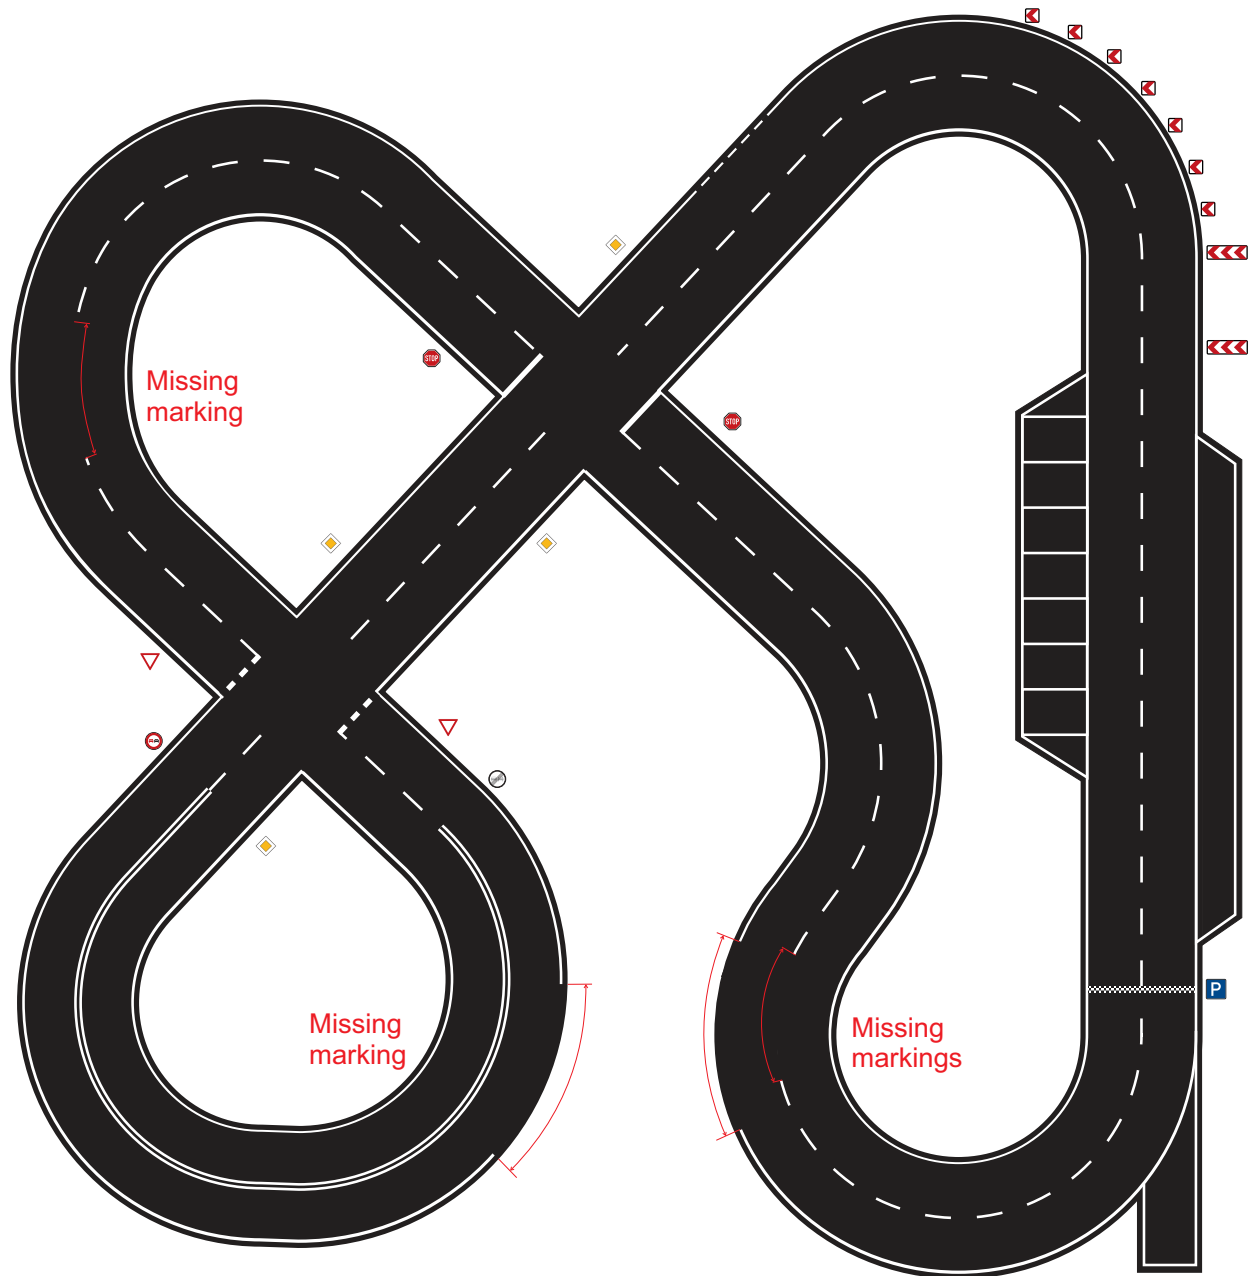



## A.5 Markings of the Start Box Gate

